

AZAI6WP2GR1 - Aidoo Pro STI Gree U-Match R32

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:
Additional Info:	

MODEL DESCRIPTION

Device to manage and integrate units remotely from the Cloud. Online control with the "Airzone Cloud" App (available for iOS and Android). Wireless Dual Wi-Fi connection (2.4/5 GHz). Powered by an external 24 VAC power supply unit that is not included. Features:


- Unit control and error detection.
- Configurable digital input for open window detection or occupancy presence.
- Auxiliary heat control and heat source locking.
- Automatic change of the operation mode with the adjustment of two set-point temperatures.
- Temperature limitation for cooling and heating modes.
- Status, temperature, mode and speed time schedules.
- Cloud and wired integration with third-party smart thermostats (3PI).
- Integration via Modbus RTU/TCP or BACnet MS-TP/IP.
- Local API and Cloud API integration services, mDNS multicast.


[Click to download](#)



TECHNICAL SPECS

RS485 Port		WI-FI	
Communication protocol	RS-485 BACnet MS-TP Par – 19200 bps	Protocol	WI-FI – CERTIFIED TM 802.11a/b/g/n/ac (802.11n up to 150 Mbps)
Shielded twisted pair	AWG 23 – 2 wired + AWG 20 – 1 wired 2 x 0.22 + 1 x 0.5 mm ² Min: 0.2 mm ² / Máx: 1.5 mm ²	Model	LBEE5HY1MW
Connection to indoor unit	Max. distance	Communication frequency	2.4 GHz (max. 150 Mbps) 5 GHz (max. 433 Mbps)
	32.8 ft (10 m)	Max. power, Antenna power	17.93 dBm, 0.1 dBi
Digital input	State	Sensitivity	- 82 dBm
	Voltage-free	IP address	DHCP
Max. distance	32.8 ft (10 m)	Bluetooth	
Relay output	State	Protocol	Bluetooth v5.0 EDR and BLE specification
	Voltage-free	Bluetooth class	Class-1, class-2 and class-3 transmitter
3PTI Bus		Operating temp.	
Nº of pins	6 (RC, RH, W, Y, G, C)	Storage	- 4 ... 158 °F (- 20 ... 70 °C)
V out (RC, RH, C)	24 VAC	Operation	32 ... 113 °F (0 ... 45 °C)
Max. distance	8.2 ft (2.5 m)	Operating humidity range	5 ... 90 % (non-condensing)
Power supply and consumption		Mechanical aspects	
Type of power supply	VAC	Maximum operating height	6561.68 ft (2000 m)
V in	24 VAC	Protection class	IP 41
V max / I max	30 VAC / 0.35 A	Weight	0.29 lb (130 g)
Frequency	60 Hz		
Consumption	2.68 W		

DIMENSIONAL DRAWINGS

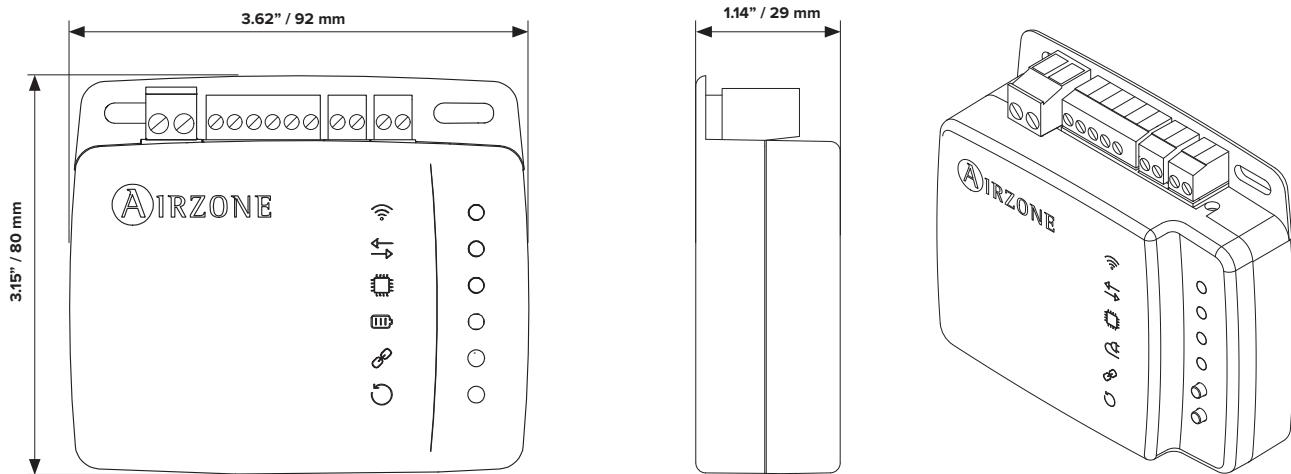

INSTALLATION

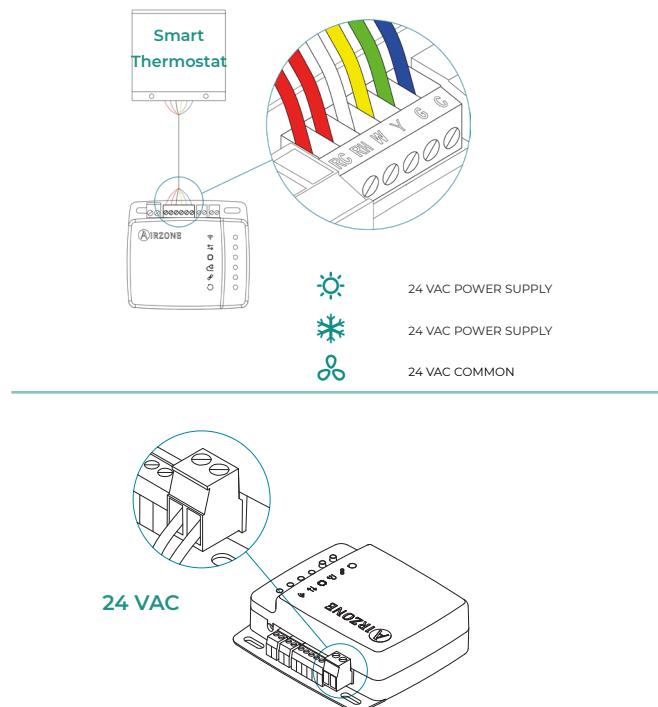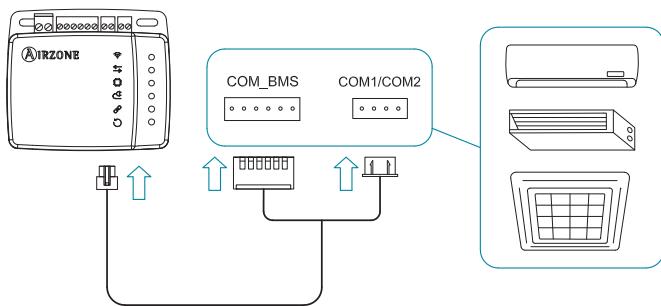

SPARE PARTS

- AZPV8WIRE04010 - Connection to Indoor unit 3.28 ft (1 m) / AWG 24 - 6 wired (6x0.2 mm²)

ACCESORIES

- AZPV8WIREU - Universal 6-pin 8.2 ft (2.5 m) extension cable for Airzone gateway / Aidoo



Marie Curie, 21
29590 Málaga, Spain

