


AZAI8HB2GW1 - Aidoo Pro HUB Giwee VRF

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:
Additional Info:	

MODEL DESCRIPTION

Device to manage and integrate units remotely from the Cloud. Online control with the "Airzone Cloud" App (available for iOS and Android). Wired network connection via Ethernet or wireless via Dual Wi-Fi (2.4/5 GHz). Features:

- Unit control and error detection.
- Configurable digital input for open window detection or occupancy presence.
- Auxiliary heat control and heat source locking.
- Automatic change of the operation mode with the adjustment of two set-point temperatures.
- Temperature limitation for cooling and heating modes.
- Status, temperature, mode and speed time schedules.
- Integration: Modbus RTU/TCP or BACnet MS-TP/IP, Airzone thermostat, Lutron Palladium thermostat. Cloud integration with third-party smart thermostats (3PI).
- Local API and Cloud API integration services, mDNS multicast.

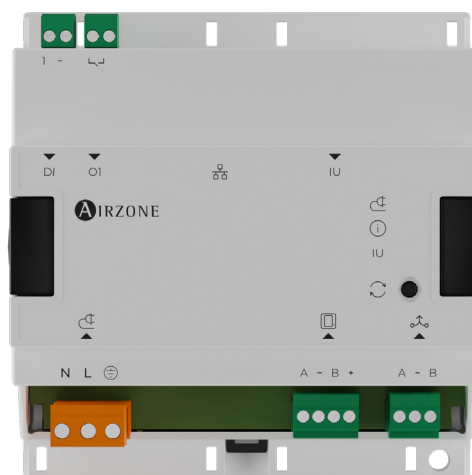


[Click to download](#)

TECHNICAL SPECS

☎ - Power supply	
V max	110 / 230 Vac
I max	250 mA
Frequency	60 / 50 Hz
Stand-by consumption	110 Vac (3.4 W) 230 Vac (4.3 W)
Module over-current protection	250 mA
📶 - Airzone bus	
🔌 - Integrations bus	
Shielded twisted pair	AWG 23 – 2 wired + AWG 20 – 2 wired (2 x 0.22 + 2 x 0.5 mm ²) AWG 23 – 2 wired + AWG 20 – 1 wired (2 x 0.22 + 1 x 0.5 mm ²) Min: AWG 24 (0.2 mm ²) / Max: AWG 15 (1.5 mm ²)
Communications protocol	RS-485 BACnet MS-TP Par – 19200 bps
DI - Digital input	
Voltage-free	
Max. distance	32.8 ft (10 m)
OI - Relay output	
Voltage-free	
V max (I max)	230 Vac (5A) 30 Vdc (3A)
🌐 - Ethernet	
Type of cable	Min. UTP cat 5
Standard	100BASE-TX
IP address	DHCP


IU - Connection to indoor unit	
Max. distance.	32.8 ft (10 m)
Wi-Fi	
Protocol	WI-FI – CERTIFIED TM 802.11a/b/g/n/ac (802.11n up to 150 Mbps)
Model	LBEE5HY1MW
Communication frequency	2.4 GHz (max. 150 Mbps) 5 GHz (max. 433 Mbps)
Max. power, Antenna power	17.93 dBm, 0.1 dBi
Sensitivity	- 82 dBm
IP address	DHCP
Bluetooth	
Protocol	Bluetooth v5.0 EDR and BLE specification
Bluetooth class	Class-1, class-2 and class-3 transmitter
Max. power, Antenna power	5.46 dBm, 0.1 dBi
Operating temp.	
Storage	- 4 ... 158 °F (- 20 ... 70 °C)
Operation	32 ... 113 °F (0 ... 45 °C)
Operating humidity range	5 ... 90 % (non-condensing)
Mechanical aspects	
WProtection class	IP 20
Weight	0.46 lb (210 g)
In DIN units	6
Max. operating height	6561.68 ft (2000 m)

DIMENSIONAL DRAWINGS



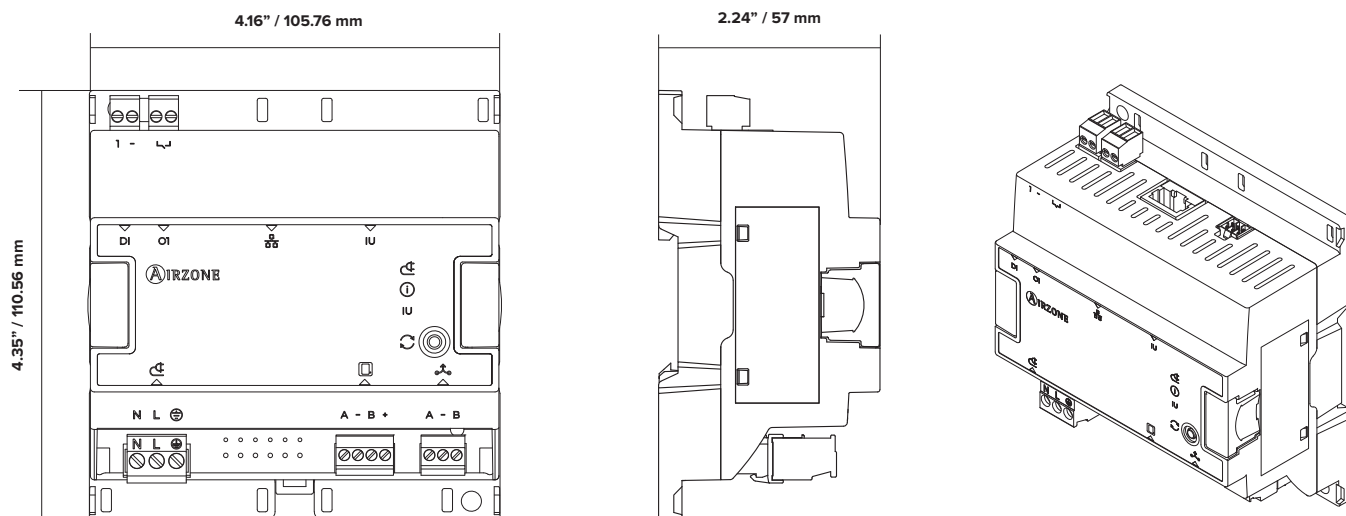


INSTALLATION

OPTION A: 2 CONNECTORS

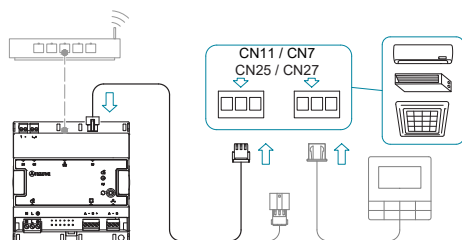

OPTION B: SINGLE CONNECTOR

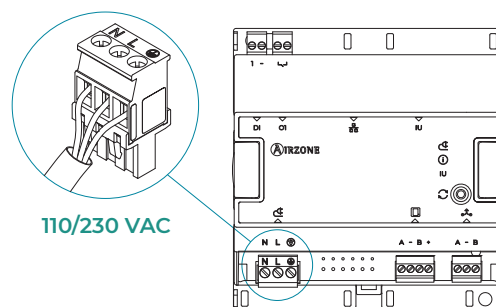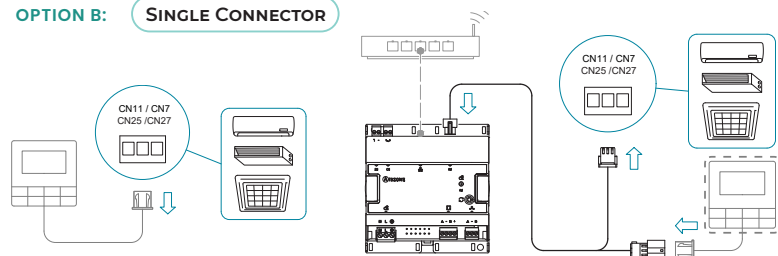

SPARE PARTS

- AZPV8WIRE01 - Connection to Indoor unit 8.2 ft (2.5 m) / AWG 24 - 6 wired (6x0.2 mm²)

ACCESORIES

- AZAI6BLUEZERO[C/N] - Airzone Aidoo Pro Blueface Zero Color Thermostat Wired
- AZPV8WIREU - Universal 6-pin 8.2 ft (2.5 m) extension cable for Airzone gateway / Aidoo



Marie Curie, 21
29590 Málaga, Spain

